



Castle Link Program Settings Report

Title: Setup 2018
Date: 4/13/2018 3:55:25 PM

Basic

Cutoff Voltage	132
Auto-Lipo Volts/Cell	3.3 Volts/Cell
Reverse Type	Without Reverse
BEC Voltage	7.5V
Idle/Error Beep Disable	4
Brake Amount	50% (Default)
Drag Brake	0.0%, Disabled (Default)

Power

Start Power	Low (Default)
Max Power	100% (Default)
Reverse Percentage	50% (Default)
Punch Control	0%, Disabled (Default)
Torque Control Value	0
Torque Control Electrical Motor kV	2593

Advanced

Arming Time	1.5s (Default)
Auxiliary Wire Mode	16
Link Live Enable	Enabled
Throttle Dead Band	Small (0.0500 ms)
Full Reverse	0.871 ms
Neutral	1.487 ms
Full Forward	2.104 ms


Motor

Motor Direction	Reverse
Motor Type	Smart Sense™ Brushless (Default), Checkbox: True
Sensorless Motor Timing	Lowest (0)
Motor Temperature Cutoff	Medium (180°F / 82°C)


Logging

Data Log Enabled	2047
Sample Frequency	Disabled
Automatic Data Reset	Disabled (100%) (Default)

Throttle Curve

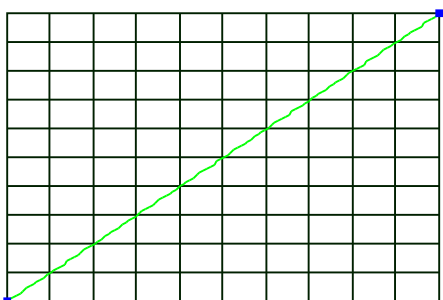

Brake Curve

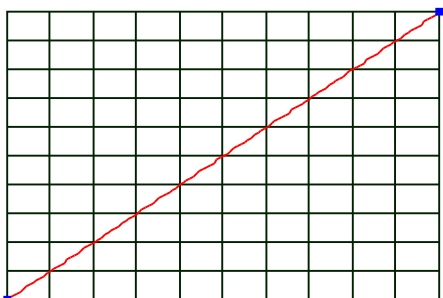

Software