

Title: Associated T4 - 2019  
Date: 2/8/2019 10:56:12 PM

### Basic

Cutoff Voltage	Auto Li-Po (Default)
Auto-Lipo Volts/Cell	3.4 Volts/Cell
Reverse Type	Without Reverse
BEC Voltage	6.0V
Idle/Error Beep Disable	4
Brake Amount	50% (Default)
Drag Brake	0.0%, Disabled (Default)

### Power

Start Power	Low (Default)
Max Power	100% (Default)
Reverse Percentage	50% (Default)
Punch Control	0%, Disabled (Default)
Torque Control Value	0
Torque Control Electrical Motor kV	2523

### Advanced

Arming Time	1.5s (Default)
Auxiliary Wire Mode	16
Link Live Enable	Enabled
Throttle Dead Band	Small (0.0500 ms)
Full Reverse	0.880 ms
Neutral	1.491 ms
Full Forward	2.087 ms


### Motor

Motor Direction	Normal (Default)
Motor Type	Smart Sense™ Brushless (Default), Checkbox: True
Sensorless Motor Timing	Normal (10) (Default)
Motor Temperature Cutoff	Medium (180°F / 82°C)


### Logging

Data Log Enabled	2047
Sample Frequency	Disabled
Automatic Data Reset	Disabled (100%) (Default)

### Throttle Curve

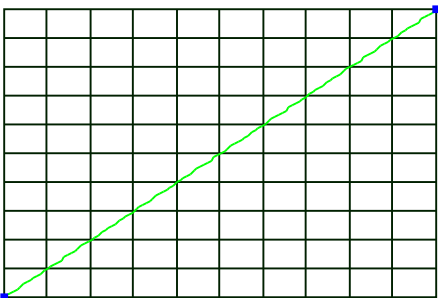

### Brake Curve

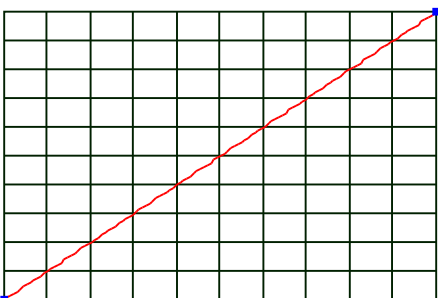

### Software

Device Name	Mamba X (F583)
Current Firmware	V 2.02